


## Basket Tray

For naval applications:

- H.30 - from B.100 to B.300
- H.60 - from B.100 to B.500

H.30 - Not UL certified

**ERSYCONNECT**  
BASKET TRAY



RV 003 0320

Length: 3000

Coatings

- 03 Hot dip galvanizing - UNI EN ISO 1461
- 25 Electro galvanization - DIN 50962
- 40 Stainless steel AISI 304 - UNI EN 10088

Technical Characteristics	
Dimension	
W (B)	200
Weight	
[Kg/m]	0,92
L	
[mm]	3000
Technical Info	
Clip on base*	–
H [mm]	35
W [mm]	202
SWL [N/m 1,5m]	199
n° wires	4
Wire Ø	
03	3,90
25	3,90
40	4,00
UL Certification	
UL suffix	–

\* To request UL certified material add the suffix UL to the code - Ex: **RV 003 0606 25 UL**

\* Quick joint clip on trays base Absent (-)

\* Quick joint clip on trays base Present (n)

## Basket Tray

Rod pitch (mesh width): 50 mm (on the base B)

\* Usable sections see Assembly page  
(download Documents)

[RV 013 - wires version \(2 wires on the base\)](#)

1) Hot dip galvanized


2) Stainless Steel AISI 304 / AISI 316L

1) Classified 8 – according to IEC 61537  
Average Thickness of Zinc layer for HDG coatings  
ranges from 85  $\mu\text{m}$  to 100  $\mu\text{m}$

2) Classified 9D – according to IEC 61537 corrosion  
resistance

### Basket Tray

Load Diagram

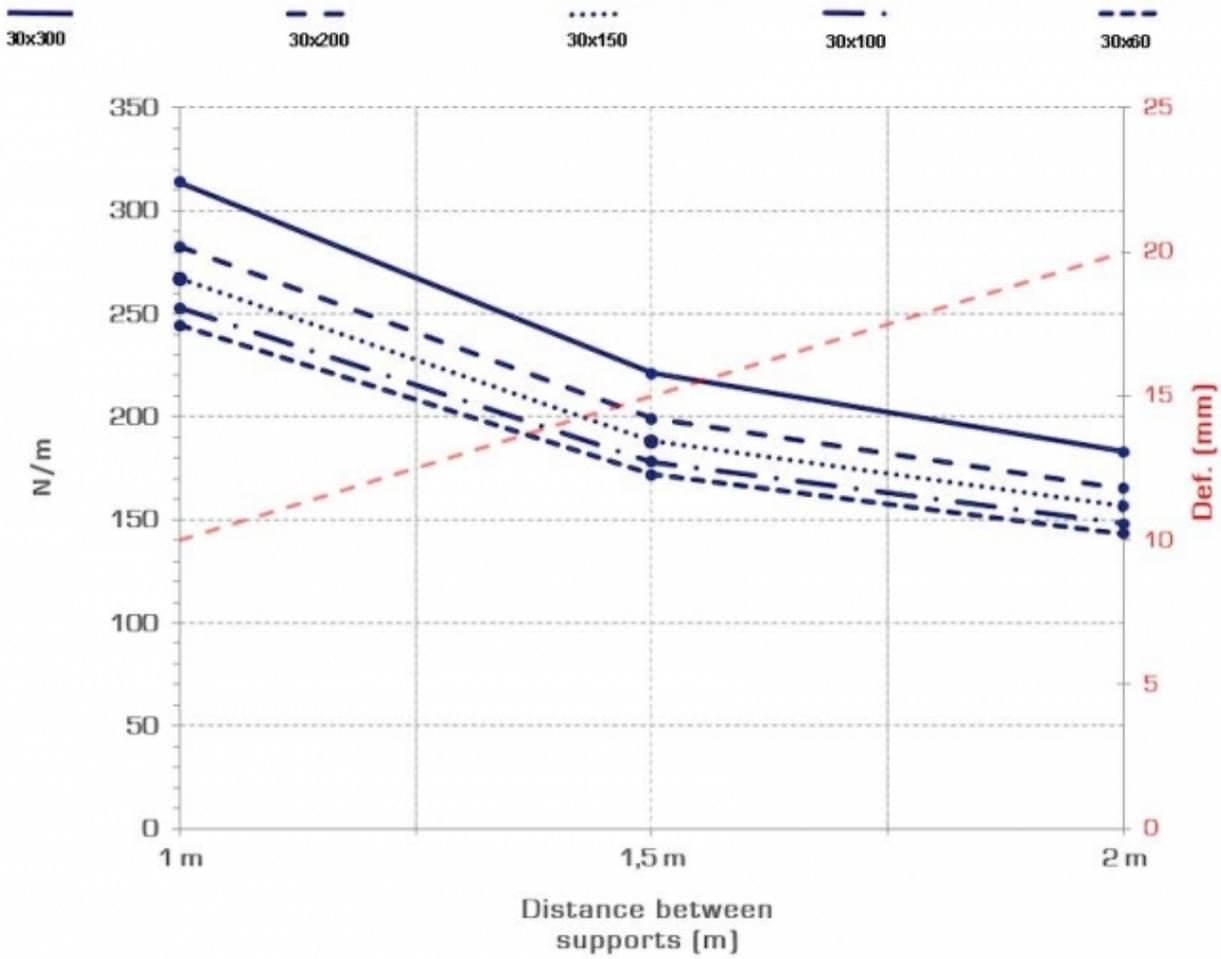

y= Max load (N/m)  
 x= Distance between supports (m)