


Basket Tray



Available in heights (H):

30

60

100

Dimension	Weight	L	Technical Info				Wire Ø			UL Certification	Code		
			Clip on base*	H [mm]	W [mm]	SWL [N/m 1,5m]	n° wires	03	25			40	
W (B)	[Kg/m]	[mm]											
60	03 25 40	0,50	3000	-	35	70	172	2	3,90	3,90	4,00	-	RV 003 0306
100	03 25 40	0,55	3000	-	35	102	178	2	3,90	3,90	4,00	-	RV 003 0310
150	03 25 40	0,70	3000	-	35	152	188	3	3,90	3,90	4,00	-	RV 003 0315
200	03 25 40	0,92	3000	-	35	202	199	4	3,90	3,90	4,00	-	RV 003 0320
300	03 25 40	1,35	3000	-	35	302	221	6	4,30	4,30	4,40	-	RV 003 0330

* To request UL certified material add the suffix UL to the code - Ex: **RV 003 0606 25 UL**

* Quick joint clip on trays base Absent (-)

* Quick joint clip on trays base Present (n)

Rod pitch (mesh width): 50 mm (on the base B)

* **Usable sections see Assembly page (download Documents)**

[RV 013 - wires version \(2 wires on the base\)](#)

List of Coatings

Hot dip galvanizing - UNI EN ISO 1461

Electrogalvanization - DIN 50962

Stainless steel AISI 304 - UNI EN 10088

1) Hot dip galvanized 2) Stainless Steel AISI 304 / AISI 316L


1) Classified 8 – according to IEC 61537

Average Thickness of Zinc layer for HDG coatings ranges from 85 µm to 100 µm

2) Classified 9D – according to IEC 61537 corrosion resistance

Basket Tray

Load Diagram

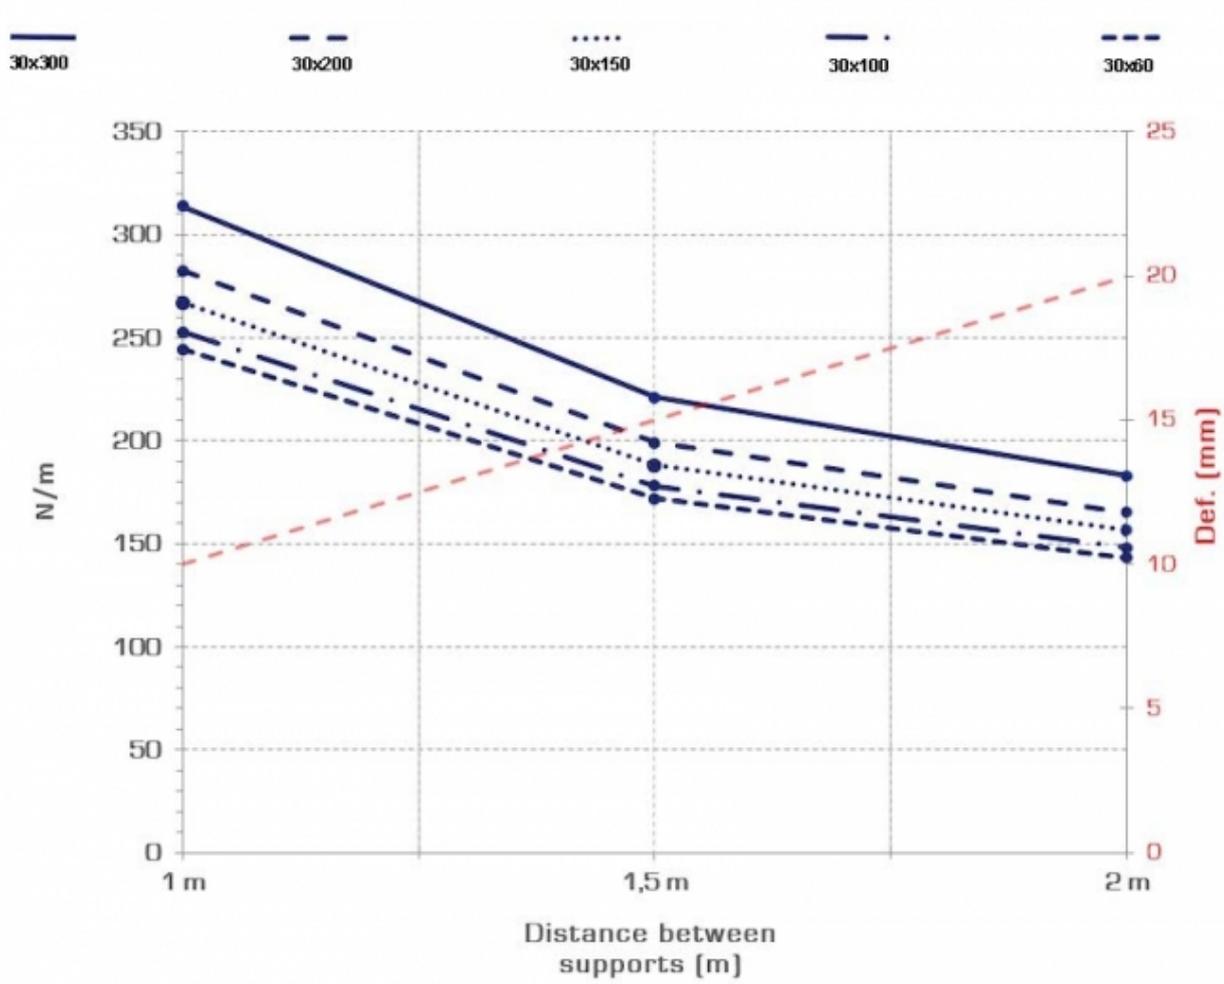

y= Max load (N/m)
x= Distance between supports (m)