


## Basket Tray



Available in heights (H):

- 30
- 60
- 100

Dimension	Weight	L	Technical Info				Wire Ø			UL Certification	Code	
W (B)	[Kg/m]	[mm]	Clip on base*	H [mm]	W [mm]	SWL [N/m 1,5m]	n° wires	03	25	40	UL suffix	
60	0,52	3000	-	55	60	290	-	3,90	3,90	4,00	UL	RV 003 0606
100	0,76	3000	-	60	102	323	2	3,90	3,90	4,00	UL	RV 003 0610
150	0,90	3000	-	60	152	345	3	3,90	3,90	4,00	UL	RV 003 0615
200	1,04	3000	-	60	202	368	4	3,90	3,90	4,00	UL	RV 003 0620
300	1,61	3000	-	60	302	413	6	4,30	4,30	4,40	UL	RV 003 0630
400	2,10	3000	n (1)	60	402	457	8	4,30/4,80	4,30/4,80	4,40/4,70	UL	RV 003 0640
500	2,70	3000	n (2)	60	502	502	10	4,60/4,80	4,60/4,80	4,70	UL	RV 003 0650
600	3,11	3000	n (2)	60	602	547	12	4,60/4,80	4,60/4,80	4,70	UL	RV 003 0660

\* To request UL certified material add the suffix UL to the code - Ex: **RV 003 0606 25 UL**

\* Quick joint clip on trays base Absent (-)  
 \* Quick joint clip on trays base Present (n)  
 Rod pitch (mesh width): 50 mm (on the base B)

\* **Usable sections see Assembly page (download Documents)**

[RV 013 - wires version \(2 wires on the base\)](#)

## Basket Tray

## List of Coatings

Hot dip galvanizing - UNI EN ISO 1461

Electrogalvanization - DIN 50962


Stainless steel AISI 304 - UNI EN 10088

1) Hot dip galvanized 2) Stainless Steel AISI 304 / AISI 316L

1) Classified 8 – according to IEC 61537  
Average Thickness of Zinc layer for HDG coatings ranges from 85  $\mu\text{m}$  to 100  $\mu\text{m}$   
2) Classified 9D – according to IEC 61537 corrosion resistance

### Basket Tray

Load Diagram

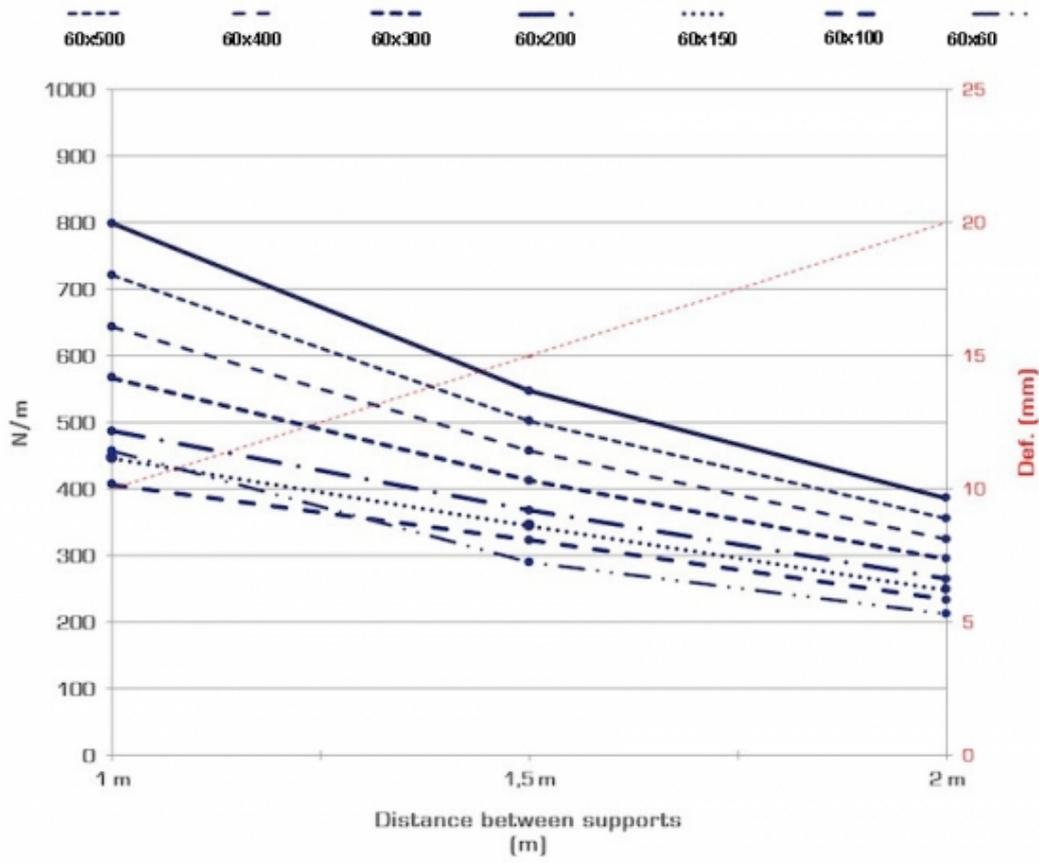

y= Max load (N/m)  
 x= Distance between supports (m)