


Basket Tray



Available in heights (H):

- 30
- 60
- 100

Dimension	Weight	L	Technical Info				Wire Ø			UL Certification	Code		
			W (B)	[Kg/m]	[mm]	Clip on base*	H [mm]	W [mm]	SWL [N/m 1,5m]			n° wires	03
60	03 25 40	0,50	3000	-	35	70	172	2	3,90	3,90	4,00	-	RV 003 0306
100	03 25 40	0,55	3000	-	35	102	178	2	3,90	3,90	4,00	-	RV 003 0310
150	03 25 40	0,70	3000	-	35	152	188	3	3,90	3,90	4,00	-	RV 003 0315
200	03 25 40	0,92	3000	-	35	202	199	4	3,90	3,90	4,00	-	RV 003 0320
300	03 25 40	1,35	3000	-	35	302	221	6	4,30	4,30	4,40	-	RV 003 0330

* To request UL certified material add the suffix UL to the code - Ex: **RV 003 0606 25 UL**

* Quick joint clip on trays base Absent (-)
 * Quick joint clip on trays base Present (n)
 Rod pitch (mesh width): 50 mm (on the base B)

* **Usable sections see Assembly page (download Documents)**

RV 013 - wires version (2 wires on the base)

Certifications



List of Coatings


- Hot dip galvanizing - UNI EN ISO 1461
- Electrogalvanization - DIN 50962
- Stainless steel AISI 304 - UNI EN 10088

1) Hot dip galvanized 2) Stainless Steel AISI 304 / AISI 316

- 1) Classified 8 – according to IEC 61537
Average Thickness of Zinc layer for HDG coatings ranges from 85 µm to 100 µm
- 2) Classified 9D – according to IEC 61537 corrosion resistance

Basket Tray

Load Diagram

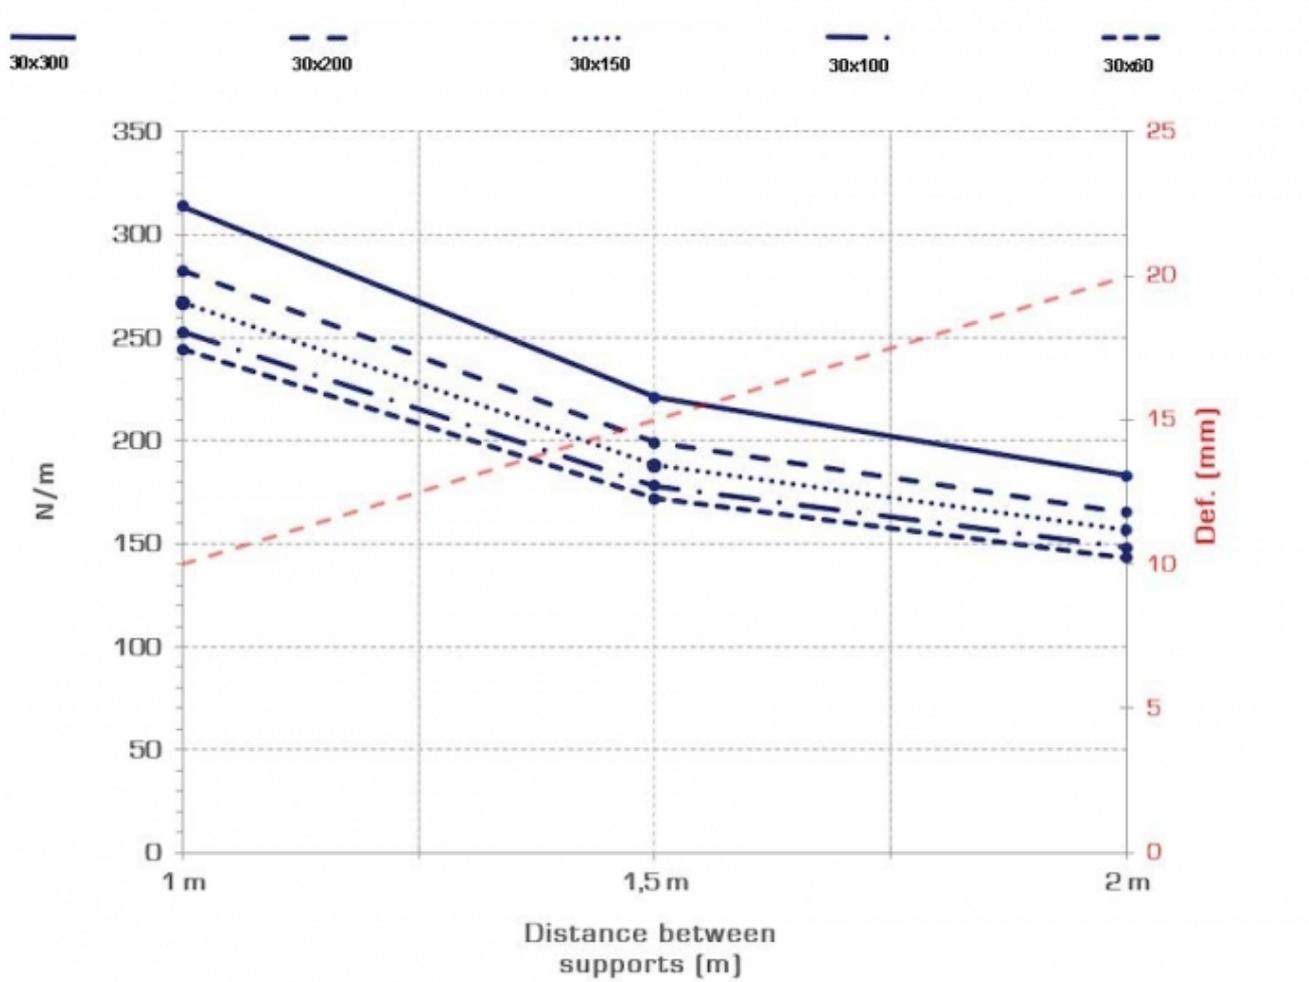

y= Max load (N/m)
 x= Distance between supports (m)