



Basket Tray



Available in heights (H):

30

60

100

Dimension				Weight	L	Technical Info						Wire Ø			UL Certification	Code
W (B)				[Kg/m]	[mm]	Clip on base*	H [mm]	W [mm]	SWL [N/m 1,5m]	n° wires	03	25	40	UL suffix		
60	03	25	40	0,52	3000	–	55	60	290	–	3,90	3,90	4,00	UL	RV 003 0606	
100	03	25	40	0,76	3000	–	60	102	323	2	3,90	3,90	4,00	UL	RV 003 0610	
150	03	25	40	0,90	3000	–	60	152	345	3	3,90	3,90	4,00	UL	RV 003 0615	
200	03	25	40	1,04	3000	–	60	202	368	4	3,90	3,90	4,00	UL	RV 003 0620	
300	03	25	40	1,61	3000	–	60	302	413	6	4,30	4,30	4,40	UL	RV 003 0630	
400	03	25	40	2,10	3000	n (1)	60	402	457	8	4,30/4,80	4,30/4,80	4,40/4,70	UL	RV 003 0640	
500	03	25	40	2,70	3000	n (2)	60	502	502	10	4,60/4,80	4,60/4,80	4,70	UL	RV 003 0650	
600	03	25	40	3,11	3000	n (2)	60	602	547	12	4,60/4,80	4,60/4,80	4,70	UL	RV 003 0660	

* To request UL certified material add the suffix
UL to the code - Ex: **RV 003 0606 25 UL**

* Quick joint clip on trays base Absent (-)

* Quick joint clip on trays base Present (n)

Rod pitch (mesh width): 50 mm (on the base B)

* **Usable sections see Assembly page**
(download Documents)

[RV 013 - wires version \(2 wires on the base\)](#)

Basket Tray

Certifications



List of Coatings

Hot dip galvanizing - UNI EN ISO 1461

Electrogalvanization - DIN 50962

Stainless steel AISI 304 - UNI EN 10088

1) Hot dip galvanized 2) Stainless Steel AISI 304 / AIS


1) Classified 8 – according to IEC 61537

Average Thickness of Zinc layer for HDG coatings ranges from 85 µm to 100 µm

2) Classified 9D – according to IEC 61537 corrosion resistance

Basket Tray

Load Diagram

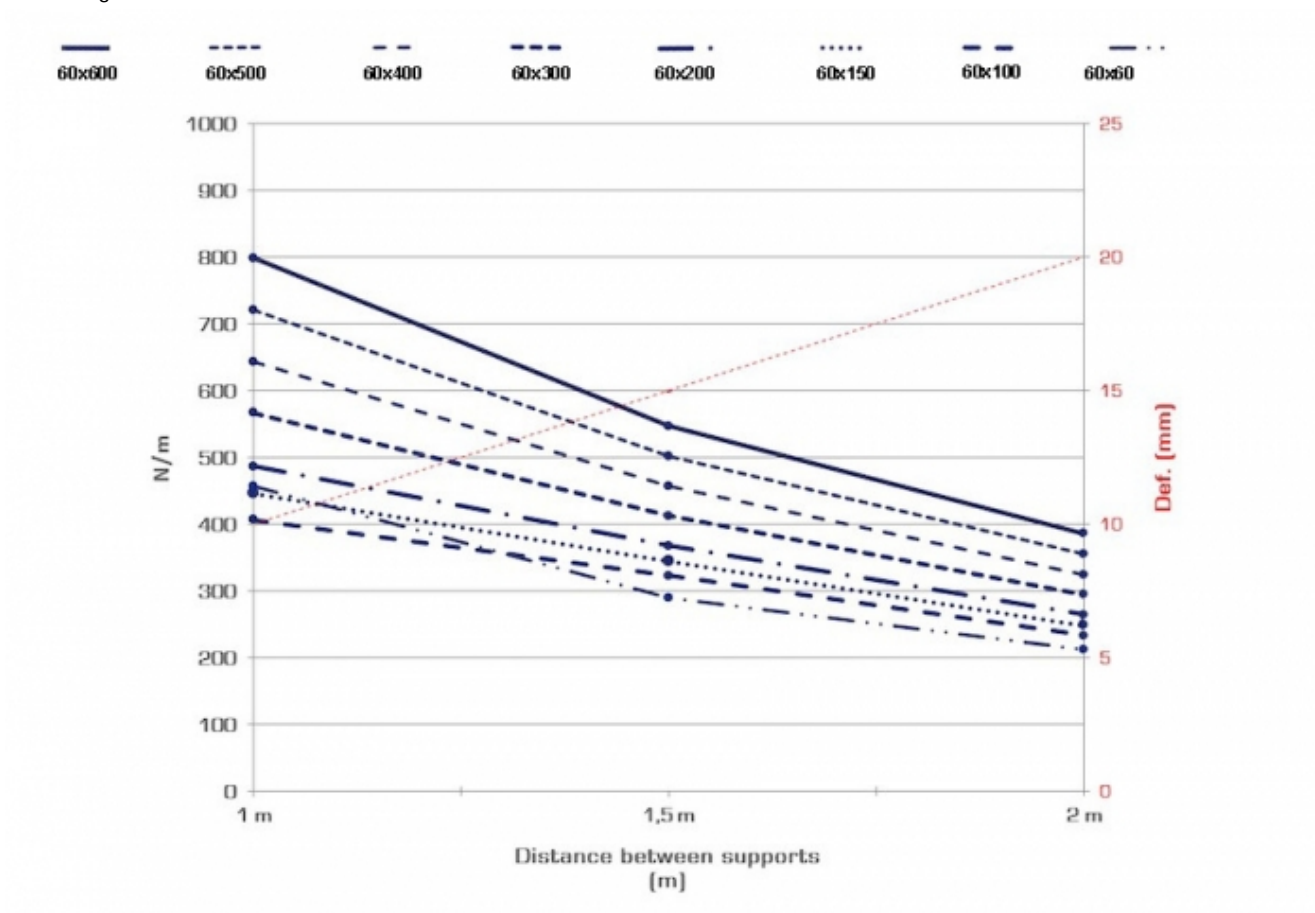

y= Max load (N/m)

x= Distance between supports (m)