


Basket tray (RV 013) - 6 wires



Available in heights (H):

60

Dimension	Weight	L	Technical Info				Wire Ø			Code
W (B)	[Kg/m]	[mm]	Clip on base*	H [mm]	W [mm]	SWL [N/m 1,5m]	03	25	40	
60	0,73	3000	-	51	66	290	3,90	3,90		RV 013 0606
60	0,75	3000	-	55	73	290	-	-	4,00	RV 013 0606

* Quick joint clip on trays base Absent (-)
 * Quick joint clip on trays base Present (n)
 Rod pitch (mesh width): 50 mm (on the base B)

Certifications



List of Coatings


- Hot dip galvanizing - UNI EN ISO 1461
- Electro galvanization - DIN 50962
- Stainless steel AISI 304 - UNI EN 10088

1) Hot dip galvanized 2) Stainless Steel AISI 304 / AISI 316

1) Classified 8 – according to IEC 61537
 Average Thickness of Zinc layer for HDG coatings ranges from 150 µm to 200 µm
 2) Classified 9D – according to IEC 61537 corrosion resistance

Basket tray (RV 013) - 6 wires

Load Diagram

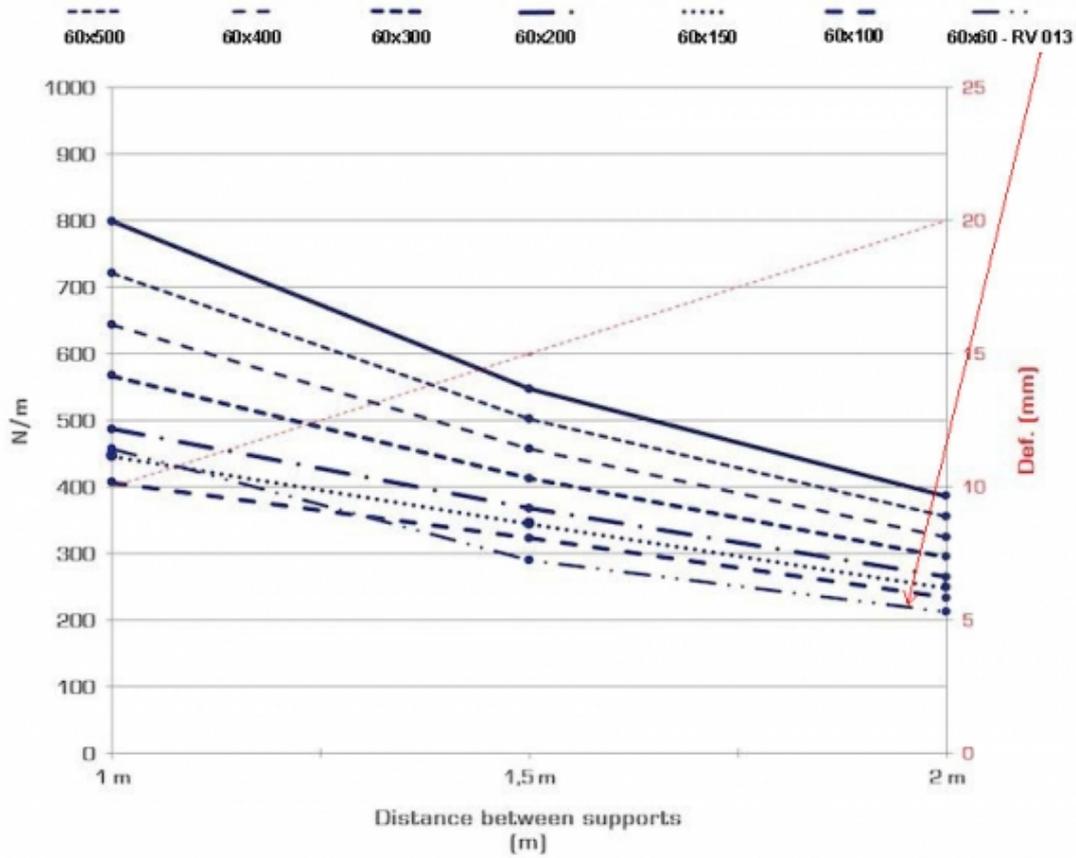

y= Max load (N/m)
 x= Distance between supports (m)