


Joint plate



T0 200 0007

Length: 0

Coatings

01 Galvanization (Sendzimir method) - UNI EN 10346

Technical Characteristics	
Dimension	
H	75
Thickness	
Weight	
[Kg]	0,04
Technical Info	
a	47
w (b)	53
L	26
l	35
d	M6

Certified System
- IMQ - EN 61537-1 ed.2007 - EN 50085-1:2005 ed EN 50085-2-1:2006 - UL file E471266 Attention: for ZT and ZM material sold/assembled in U.S.A. and Canada, please require UL mark

Certifications



H.50 - Joint plate with threaded pins

To be installed also with item T0 053 - H.50 - Cable tray for motorway tunnels


H.75/100 - Joint plate with movable screws

Joint plate

Applications

Our movable screw joint system is extremely useful. It is a great innovation that combines quick assembly and equipotential connection of the elements of the ZT system.

Inside the trunking, the heads of the bolts are recessed and protected by a plate (1) which makes it possible to pull electric cables without fear of damaging them.

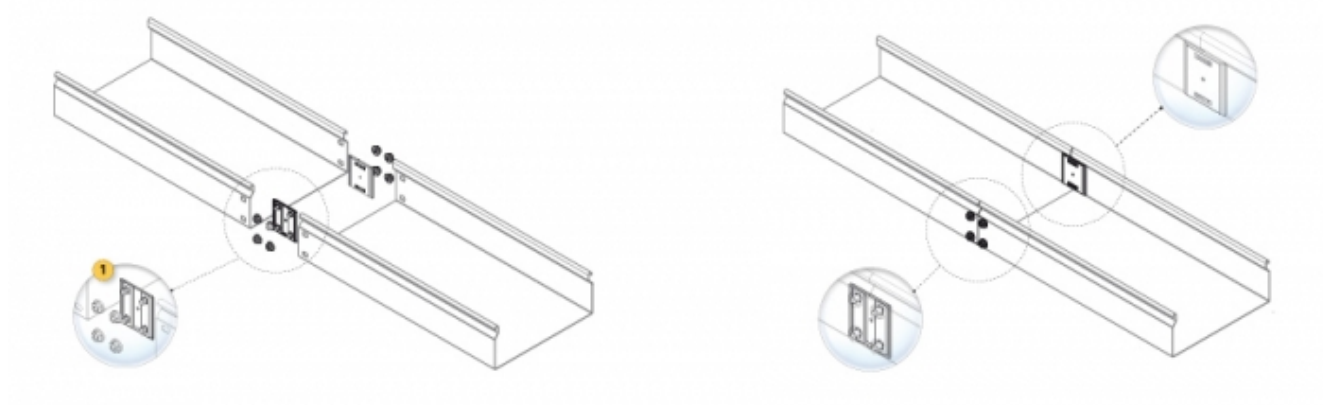

Joint plate

Assembly

 n. 4 M6 T0 621 0600 *included*

[See the video](#)

