


## Inside "U" joint

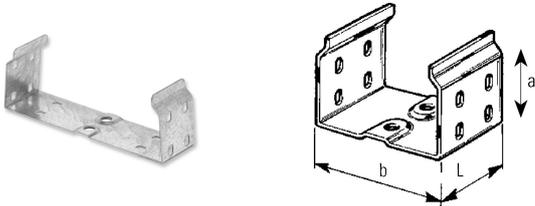

T0 203 0740

Length: 0

Coatings

- 01 Galvanization (Sendzimir method) - UNI EN 10346
- 03 Hot dip galvanizing - UNI EN ISO 1461
- 11 Grey RAL 7032 - ISO9227-ISO6270-ISO2810
- 15 Blue RAL 5015 - ISO9227-ISO6270-ISO2810
- 40 Stainless steel AISI 304 - UNI EN 10088

Technical Characteristics	
Dimension	
W (B)	400
Weight	
[Kg]	0,33
Technical Info	
a	70
w (b)	396
L	52

Certified System
- IMQ
- EN 61537-1 ed.2007
- EN 50085-1:2005 ed EN 50085-2-1:2006
- UL file E471266
Attention: for ZT and ZM material sold/assembled in U.S.A. and Canada, please require UL mark

## Certifications




## Inside "U" joint

## Assembly

H50		n. 4 M6x10 / M6x12	<b>T0 620 0610 / T0 620 0612</b>
		n. 4 M6	<b>T0 621 0600</b>
H75-100		n. 8 M6x10 / M6x12	<b>T0 620 0610 / T0 620 0612</b>
		n. 8 M6	<b>T0 621 0600</b>

*Not included*

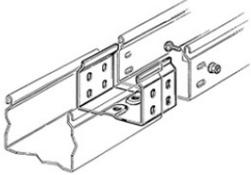

In the case of the installation of internal "U" joints on painted items, preparation with equipotential plates is required.