


Hermetical seal kit for IP44



Available in heights (H):

50

75

100

Dimension	Weight	Self-extinguishing rubber seal	Code
W (B)	[Kg]	(mt) T1 680 0520 (mt) T1 680 0310	
100	0,55	0,11 0,33	T2 203 1010
150	0,62	0,17 0,39	T2 203 1015
200	0,70	0,22 0,44	T2 203 1020
300	0,87	0,33 0,55	T2 203 1030
400	1,03	0,44 0,66	T2 203 1040
500	1,20	0,55 0,77	T2 203 1050
600	1,37	0,66 0,88	T2 203 1060

Use the code:

T1 680 - Self-extinguishing rubber seal for kit IP44

T1 680 0520 32 - 20mt.

T1 680 0310 32 - 25mt.

Certifications



E471266



List of Coatings

Galvanization (Sendzimir method) - UNI EN 10346


Grey RAL 7032 - ISO9227-ISO6270-ISO2810

Blue RAL 5015 - ISO9227-ISO6270-ISO2810

Hermetical seal kit for IP44

Applications

The ZT System can be hermetically sealed to provide IP44 protection, using the Kit (T2 203)

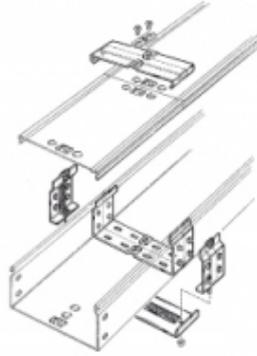

Component available on demand