


Hermetical seal kit for IP44



Available in heights (H):

- 50
- 75
- 100

Dimension	Weight	Self-extinguishing rubber seal		Code
W (B)	[Kg]	(mt) T1 680 0520	(mt) T1 680 0310	
50	0,30	0,06	0,17	T2 203 0505
100	0,39	0,11	0,22	T2 203 0510
150	0,47	0,17	0,28	T2 203 0515
200	0,55	0,22	0,33	T2 203 0520
300	0,72	0,33	0,44	T2 203 0530
400	0,88	0,44	0,55	T2 203 0540
500	1,05	0,55	0,66	T2 203 0550
600	1,21	0,66	0,77	T2 203 0560

Use the code:

T1 680 - Self-extinguishing rubber seal for kit

IP44

T1 680 0520 32 - 20mt.

T1 680 0310 32 - 25mt.

Certifications



E471266



List of Coatings

Galvanization (Sendzimir method) - UNI EN 10346


Grey RAL 7032 - ISO9227-ISO6270-ISO2810

Blue RAL 5015 - ISO9227-ISO6270-ISO2810

Hermetical seal kit for IP44

Applications

The ZT System can be hermetically sealed to provide IP44 protection, using the Kit (T2 203)

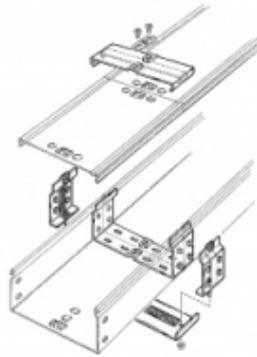

Component available on demand