


Hermetical seal kit for IP44



Available in heights (H):

- 50
- 75
- 100

Dimension	Weight	Self-extinguishing rubber seal		Code
W (B)	[Kg]	(mt) T1 680 0520	(mt) T1 680 0310	
75	0,43	0,08	0,24	T2 203 0707
100	0,47	0,11	0,26	T2 203 0710
150	0,55	0,17	0,32	T2 203 0715
200	0,64	0,22	0,37	T2 203 0720
300	0,80	0,33	0,48	T2 203 0730
400	0,97	0,44	0,59	T2 203 0740
500	1,14	0,55	0,70	T2 203 0750
600	1,30	0,66	0,81	T2 203 0760

Use the code:

T1 680 - Self-extinguishing rubber seal for kit

IP44

T1 680 0520 32 - 20mt.

T1 680 0310 32 - 25mt.

Certifications



List of Coatings


- Galvanization (Sendzimir method) - UNI EN 10346
- Grey RAL 7032 - ISO9227-ISO6270-ISO2810
- Blue RAL 5015 - ISO9227-ISO6270-ISO2810



Hermetical seal kit for IP44

Applications

The ZT System can be hermetically sealed to provide IP44 protection, using the Kit (T2 203)

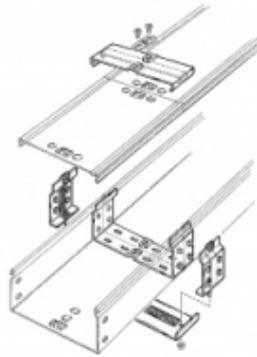

Component available on demand