

## Hinged Cable tray IP40



Available in heights (H):

- 50
- 75
- 100

Dimension		Thickness	Weight	Geometrical section	Conductor section	Hinge quantity		Code	
W (B)		[mm]	[Kg/m]	[cm <sup>2</sup> ]	[mm <sup>2</sup> ]	T0 601	T0 602		
75	01	15	0,60	1,65	51,9	145,80	1	2	T4 003 0707
100	01	15	0,60	1,89	70,45	160,80	1	2	T4 003 0710
150	01	15	0,80	2,86	107,55	254,40	1	2	T4 003 0715
200	01	15	0,80	3,41	144,03	294,40	1	2	T4 003 0720
300	01	15	1,00	5,24	218,03	468,00	1	2	T4 003 0730
400	01	15	1,00	6,52	291,02	568,00	2	3	T4 003 0740
500	01	15	1,20	9,63	364,82	799,20	2	3	T4 003 0750
600	01	15	1,20	11,20	438,62	919,20	2	3	T4 003 0760

**T0 601** Hinge without equipotential connection

**T0 602** Hinge with equipotential connection

**Upon request:**

- 03 Hot dip galvanized
- 11 Grey RAL 7032 varnished
- 40 Stainless steel AISI 304

**Certifications**



List of Coatings
Galvanization (Sendzimir method) - UNI EN 10346
Blue RAL 5015 - ISO9227-ISO6270-ISO2810

System NOT Certified


## Hinged Cable tray IP40

### Applications



Our ZT system is preset for hinged covers, allowing frequent inspections without removing the cover.

The hinge is a Zamet patent. It is easy to install also after installing the trunking system.

We are able to supply hinges with special copper earthing plait for an equipotential connection between trunking and cover.

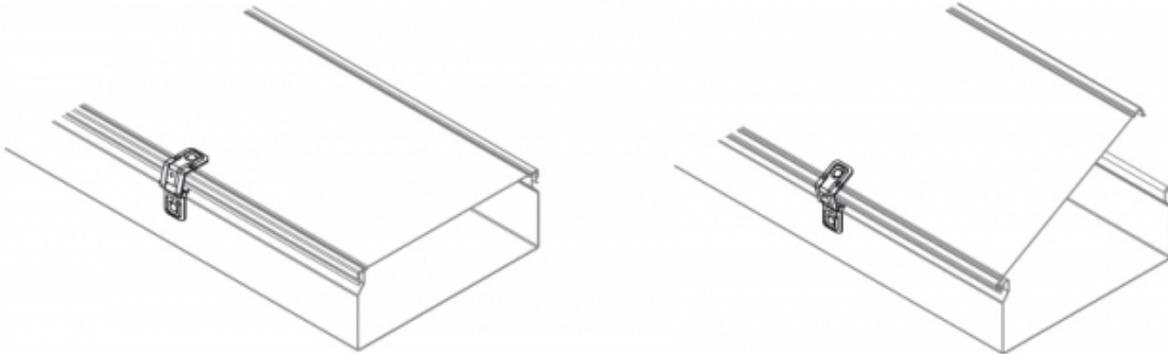

Upon request, we are able to supply hinged trunking, with hook clamps (cod. TO 610) (1) fixed by the hinges.

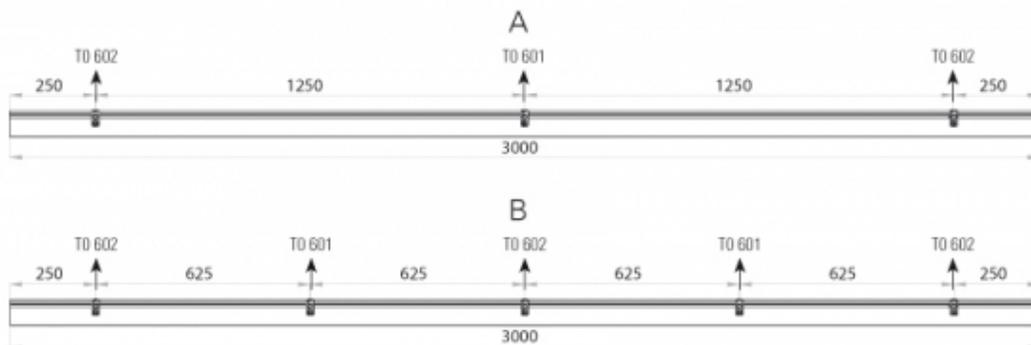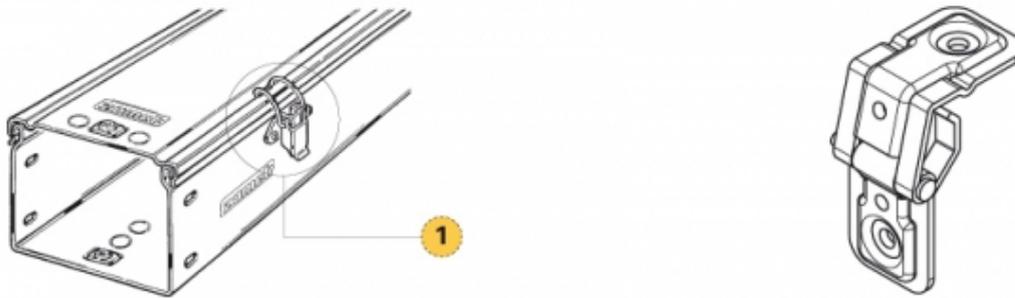

### Hinge Assembly installation scheme

Tipo A: H 50-75-100 sino alla B.300

Tipo B: H 50-75-100 sino alla B.400