


Kit per ermeticizzazione IP44



Disponibile nelle altezze (H):

50

75

100

Dimensione				Peso	Guarnizione in gomma autoestinguente		Codice
B				[Kg]	(mt) T1 680 0520	(mt) T1 680 0310	
100	01	11	15	0,55	0,11	0,33	T2 203 1010
150	01	11	15	0,62	0,17	0,39	T2 203 1015
200	01	11	15	0,70	0,22	0,44	T2 203 1020
300	01	11	15	0,87	0,33	0,55	T2 203 1030
400	01	11	15	1,03	0,44	0,66	T2 203 1040
500	01	11	15	1,20	0,55	0,77	T2 203 1050
600	01	11	15	1,37	0,66	0,88	T2 203 1060

Utilizzare il cod:

T1 680 - Guarnizione in gomma per kit IP44

T1 680 0520 32 - 20mt.

T1 680 0310 32 - 25mt.

Certificazioni



E471266



Legenda Trattamenti

Zincato Sendzimir - UNI EN 10346


Grigio RAL 7032 - ISO9227-ISO6270-ISO2810

Blu RAL 5015 - ISO9227-ISO6270-ISO2810

Kit per ermeticizzazione IP44

Applicazioni

Il sistema ZT può essere ermeticizzato IP44 utilizzando il previsto KIT (T2 203)

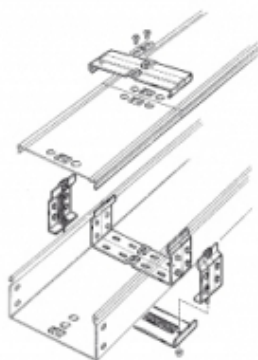

Componente a richiesta